N 70 T26CS49S0 60 CM, HOB, BLACK TEMPERED GLASS





FlameSelect® 1 0 9	► 56 <
-----------------------	--------

The gas hob with a tempered glass surface and adjustable FlameSelect.

- $\checkmark\,$ FlameSelect Thanks to the clever control of gas flow, the flame can be precisely adjusted in 9 steps. Always the same reliable and precise power levels for outstanding cooking convenience.
- $\checkmark\,$ Extremely easy-to-clean glass surface.
- \checkmark You have the option of installing the gas hob either flush or surface mounted.
- $\checkmark\,$ Continuous cast-iron pan supports for maximum stability and cooking convenience.
- $\checkmark\,$ Design co-ordinated control dials easy to operate in an attractive design.

Feature

Technical Data

Product name/family : gas hob w integrated controls Construction type : Built-in Energy input : Gas Total number of positions that can be used at the same time : 4 Required niche size for installation (HxWxD) : $45 \times 560-562 \times$ 480-492 Width of the product (mm) : 590 Dimensions of the product (mm) : 45 x 590 x 520 Dimensions of the packed product (HxWxD) (mm) : 141 x 651 x 578 Net weight (kg) : 15.104 Gross weight (kg) : 16.0 Residual heat indicator : without Location of control panel : Hob front Basic surface material : Hard Glass Color of surface : Black Color of frame : Black Approval certificates : CE, Eurasian Length of electrical supply cord (cm) : 100 EAN code : 4242004203322 Electrical connection rating (W) : 1 Gas connection rating (W): 7500 Current (A) : 3 Voltage (V) : 220-240 Frequency (Hz) : 50; 60



N 70 T26CS49S0 60 CM, HOB, BLACK TEMPERED GLASS

Features

Design

• black tempered glass

Special features

- FlameSelect with 9 steps
- Design co-ordinated control dials
- Ignition via control dials
- Cast iron pan supports with rubber feet

Power and size:

- 4 burner hob
- Left rear: Standard burner 1.75 KW
- Right rear: High speed burner 3 KW
- Left front: Standard burner 1.75 KW
- Right front: Economy burner 1 KW

Safety Features

- Flame failure safety device
- Factory set for connection to mains gas

Technical information


• Power cord length 100 cm

Accessories

• LPG jets (28-30/37mbar) included

N 70 T26CS49S0 60 CM, HOB, BLACK TEMPERED GLASS

Dimensioned drawings

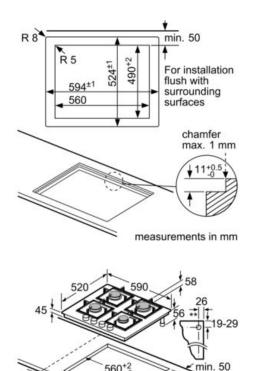

 * min.
560⁺²/₋₀
480-490⁺²/₋₀
min. 600
* Minimum distance from the hob cut-out to the wall
* Position of gas connection in the cut-out

*** With fitted oven underneath, possibly more; see space requirements for the oven measurements in mm