



N 90, Induction hob, 90 cm,  
T59TS5RNO

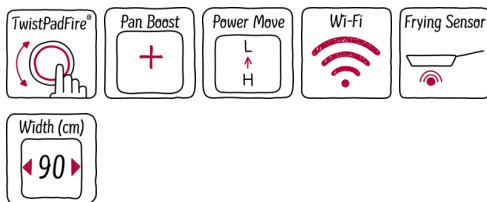

COOKING PASSION SINCE 1877

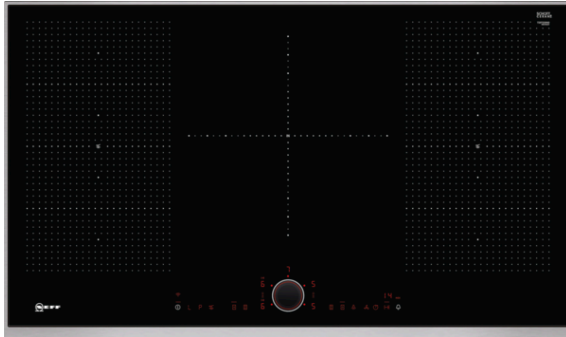

#### FlexInduction Hob with TwistPad control.

- ✓ TwistPadFire® – our removable, magnetic, illuminated control dial that gives you precise control over all cooking zones.
- ✓ Flex Induction – place your pots and pans within the flex zone anywhere you want and heat them exactly where they stand.
- ✓ Power Move – the flex zone offers three heating zones: boiling in front, simmering in the middle and warming in the rear.
- ✓ Home Connect – rediscover your kitchen with our connected home appliances, from wherever you are.
- ✓ Frying Sensor – with 5 selectable temperature settings it monitors the set temperature and holds it steady.
- ✓ Induction – the heat is generated directly in the cookware for precise cooking that stops when power is off.
- ✓ TwistPadFire® – our removable, magnetic, illuminated control dial that gives you precise control over all cooking zones.
- ✓ Flex Induction – place your pots and pans within the flex zone anywhere you want and heat them exactly where they stand.
- ✓ Power Move – the flex zone offers three heating zones: boiling in front, simmering in the middle and warming in the rear.
- ✓ Home Connect – rediscover your kitchen with our connected home appliances, from wherever you are.
- ✓ Frying Sensor – with 5 selectable temperature settings it monitors the set temperature and holds it steady.

#### Features

##### Technical Data

Product name/family : Cooking zone ceramic  
 Construction type : Built-in  
 Energy input : Electric  
 Total number of positions that can be used at the same time : 5  
 Required niche size for installation (HxWxD) : 51 x 880-880 x 490-500  
 Width of the product (mm) : 918  
 Dimensions of the product (mm) : 51 x 918 x 546  
 Dimensions of the packed product (HxWxD) (mm) : 126 x 1073 x 603  
 Net weight (kg) : 24.375  
 Gross weight (kg) : 26.2  
 Residual heat indicator : Separate  
 Location of control panel : Hob front  
 Basic surface material : Ceramic  
 Color of surface : Black, Stainless steel  
 Color of frame : Stainless steel  
 Approval certificates : AENOR, CE  
 Length of electrical supply cord (cm) : 110  
 EAN code : 4242004209560  
 Electrical connection rating (W) : 11100  
 Voltage (V) : 220-240  
 Frequency (Hz) : 50; 60

#### Optional accessories

Z9410X1	Stainless Steel roaster with glas lid
Z9415X1	Steaming Rack for Stainless Steel roaste
Z9416X2	Griddle Plate
Z9417X2	Teppan Yaki (large)
Z943SE0	Set of 2 pots and 1 pan
Z9914X0	Connecting strip



4 242004 209560

# N 90, Induction hob, 90 cm, T59TS5RNO

## Features

### Design

- 918 mm
- Ceramic glass on stainless steel trim

### Control

- TwistPad® Fire
- Frying Sensor: 5 frying levels
- Hob-Hood Control (with Wi-Fi enabled cooker hood)
- PowerMove

### Flexibility

- Ring zone triple, 2 Flex zones
- 5 zone induction hob

### Special features

- Home Connect with Remote Monitoring
- Boost setting for all zones
- PanBoost
- Variable 17-stage power settings for each zone
- Digital display of cooking levels
- 2 stage residual heat indicators
- Timer with automatic shut off for all zones LED timer for each zone with switch off function and acoustic signal Count up timer
- QuickStart function
- ReStart function
- Automatic pan recognition Safety cut out facility Control panel lock Control panel suspension
- Keep warm function
- Energy consumption display

### Technical information

- Cooking zones: 1 x Ø 400 mmx230 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 230 mm, 2.2 KW (max. Powerlevels 3.7 KW) Induction; 1 x Ø 210 mm, 3.3 KW (max. Power levels 3.7 KW) Induction; 1 x Ø 400 mmx230 mm, 3.3 KW (max. Powerstufe 3.7 KW) Induktion oder 2 x Ø 230 mm, 2.2 KW (max. Powerstufe 3.7 KW) Induction
- Measurement: (H/B/T) 51 x 918 x 546 mm
- Installation dimensions: (ID/W/D) 51 mm x 880 mm x 490 mm
- 90 cm width
- Length wire connection: 110 cm
- Main switch
- Min. worktop thickness: 20 mm
- Output 11100 W
- Cable included in packaging

N 90, Induction hob, 90 cm,  
T59TS5RN0

Dimensioned drawings

