

**Serie | 4, American side by side, 178.7
x 90.8 cm, Inox-easyclean
KAN93VIFPG**



A++

**The NoFrost side-by-side fridge-freezer with
indoor electronics: provides a modern door
display**

- **Extra Large size:** provides much more space for your food.
- **MultiBox:** transparent drawer with wave bottom, ideal for the storage of fruits and vegetables
- LED lights bring a completely new lighting concept to fridges
- **VarioZone:** more flexibility due to variable-use glass shelves and drawers in the freezer compartment.
- **NoFrost:** never defrost again, thanks to perfect protection from ice formation - that saves time and effort.

Technical Data

Construction type :	Free-standing
Door panel options :	Not possible
Height (mm) :	1787
Width of the product (mm) :	908
Depth of the product :	707
Net weight (kg) :	99.990
Connection rating (W) :	230
Current (A) :	13
Door hinge :	Left & Right
Voltage (V) :	220-240
Frequency (Hz) :	50-60
Approval certificates :	CE
Length of electrical supply cord (cm) :	200
Storage Period in Event of Power Failure (h) :	8
Number of compressors :	1
Number of independent cooling systems :	1
Interior ventilator :	No
Reversible Door Hinge :	No
Number of Adjustable Shelves in fridge compartment (Stck) :	0
Shelves for Bottles :	No
EAN code :	4242005185306
Brand :	Bosch
Product name / Commercial code :	KAN93VIFPG
Energy efficiency rating :	A++
Energy consumption annual (kWh/annum) - NEW (2010/30/EC) :	363.00
Refrigerator Net capacity (l) - NEW (2010/30/EC) :	371
Freezer Net capacity (l) - NEW (2010/30/EC) :	189
Frost free system :	Fridge and freezer
Temperature rise time (h) :	8
Freezing capacity (kg/24h) - NEW (2010/30/EC) :	12
Climate class :	SN-T
Noise level (dB(A) re 1 pW) :	42
Installation type :	N/A



4 242005 185306

Serie | 4, American side by side, 178.7 x 90.8 cm, Inox-easyclean KAN93VIFPG

The NoFrost side-by-side fridge-freezer with indoor electronics: provides a modern door display

Performance

- Energy consumption: 363 kWh kWh/yr.
- Total net capacity: 560 l litres
- Net fridge capacity: 371 litres
- Net freezer capacity: 181 litres
- Noise level dB(A) re 1 pW: 42
- Climate class SN-T (suitable for ambient temperatures between 10 to 43°C)

Design features

- Twist Ice Box removable
- Stainless Steel EasyClean doors and grey side panels
- Aluminium Vertical door handle
- No Frost
- Automatic defrost fridge
- 1 compressor
- MultiAirflow system - improves circulation of air around the fridge
- Bright interior LED fridge light
- Removable magnetic door seals - easy to clean
- Optical and accoustical

Freshness System

- VitaFresh plus: keeps food fresh for up to twice as long

Additional features

- 5 safety glass shelves in fridge compartment of which 0 are height adjustable
- 2 freezer drawers
- Freezing capacity in 24 hours: 12 kg
- Maximum freezer storage time in power failure: 8 hours
- Left hinged, Right hinged door
- Height adjustable front feet

Functions

- Electronic control for fridge and freezer with LED display
- Super Cooling: automatic deactivation
- SuperFreezing function with automatic deactivation

Key features - Fridge section


- 2 MultiBox drawers on rails - Transparent drawers with a corrugated bottom, ideal for storing fruits and vegetables.
- 3 removable door storage compartments.
- Door shelves in fridge door: 3 large and 2 small.
- 3 x egg tray
- Bright interior LED fridge light

Key features - Freezer section


- Door trays in freezer door: 5
- To achieve the declared energy consumption, the distanceholders have to be used. As a result, the appliance depth increases by about 3.5 cm. The appliance used without the distance holder is fully functional, but has a slightly higher energy consumption.
- Dimensions: 178.7 cm H x 90.8 cm W x 70.7 cm D

Serie | 4, American side by side, 178.7 x 90.8 cm, Inox-easyclean KAN93VIFPG

measurements in mm

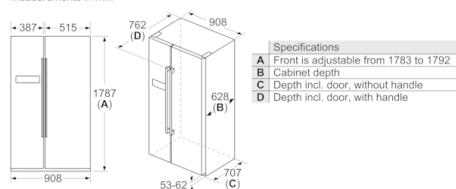


measurements in mm

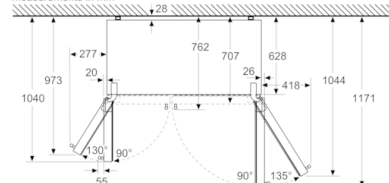

Chilling drawers can be pulled out completely at a door opening angle of 135°

measurements in mm

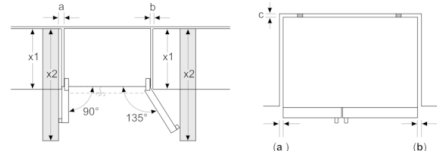

x1 (unit depth)	a	b	c
	762	100	100
x2 (wall)	75	418	50-70

Leave a clearance of min. 100 mm above the appliance. Observe minimum clearances as seen above