



iQ300, Canopy cooker hood, 53 cm, Silver metallic LB55565GB

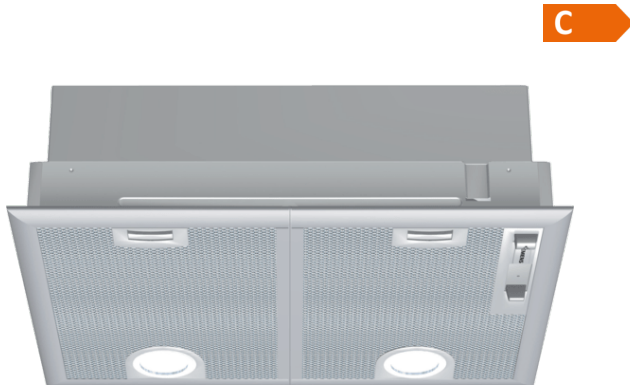

The powerful canopy cooker hood is concealed in a unit above the hob.

- ✓ LED lights: For optimal visibility and ambience when cooking.
- ✓ Calms the cooking process -#Extremely quiet

Features

Technical Data

Typology : Traditional
 Approval certificates : CE, VDE
 Length of electrical supply cord (cm) : 130
 Required niche size for installation (HxWxD) : 255mm x 500.0mm x 350mm
 Minimum distance above an electric hob : 650
 Minimum distance above a gas hob : 650
 Net weight (kg) : 7.808
 Type of control : mechanical
 Maximum output air extraction (m3/h) : 363
 Boost position output recirculating (m3/h) : 395.0
 Maximum output recirculating air (m3/h) : 268
 Boost position air extraction (m³/h) : 618
 Number of lights (Stck) : 2
 Noise level (dB(A) re 1 pW) : 56
 Diameter of air outlet (mm) : 120 / 150
 Grease filter material : Washable aluminium
 EAN code : 4242003838396
 Connection rating (W) : 206
 Current (A) : 10
 Voltage (V) : 220-240
 Frequency (Hz) : 50
 Plug type : GB plug
 Installation type : Built-in

Optional accessories

LZ74020	Accessories extractor hoods
LZ73050	Standard odor filter



iQ300, Canopy cooker hood, 53 cm, Silver metallic LB55565GB

Features

Key performance features:

- Energy Efficiency Class: C (at a range of energy efficiency classes from A+++ to D)
- Max. extraction rate: 618 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 56 dB dB*

Features

- Slider switch control for extractor speeds and light
- 3 x power levels plus intensive setting
- Twin motors
- 2 x LED spot 2.15W (low volt)
- Colour Temperature: 3500 K
- 2 x metal grease filter cassettes

Design

- For installation under an overhead canopy kitchen unit
- Canopy style
- Mechanical

Performance/technical information

- Suitable for ducted and re-circulating operation
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Extraction rate according to EN 61591 ø 15 cm:
 - max. Normal use 362 m³/h
 - Intensive 618 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
 - Max. normal use: 56 dB(A) re 1 pW
 - Intensive: 68 dB(A) re 1 pW
- Power rating: 206 W
- Light Intensity: 438 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 255-255 x 530 x 380 mm
- Dimensions recirculating, chimney (HxWxD): 255-255 x 530 x 380 mm
- - built-in dimensions (HxWxD): 255 x 500 x 350 mm
- Blower Efficiency Class: D*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: B*
- Average Energy Consumption: 79.8 kWh/year*

Optional accessories

- Recirculating kit LZ73050

* In accordance with the EU-Regulation No 65/2014

iQ300, Canopy cooker hood, 53 cm,
Silver metallic
LB55565GB

Dimensioned drawings

