


N 30, Wall-mounted cooker hood, 80 cm, Black
D85IEE1S0B



COOKING PASSION SINCE 1877

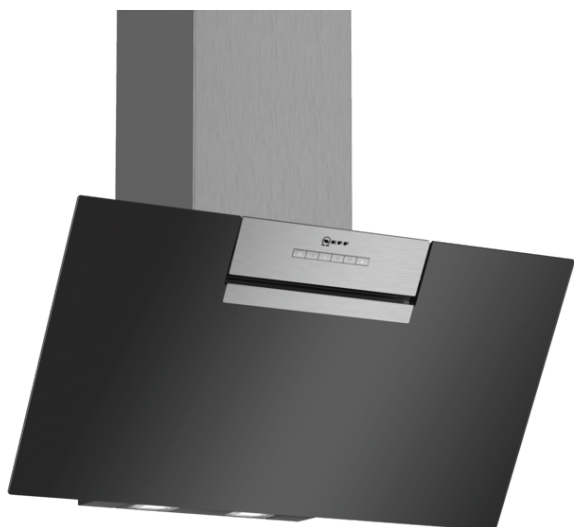

B

- ✓ Intensive speed setting: increases the extraction rate when the steam gets intense
- ✓ LED lighting: a clear illumination whilst cooking thanks to the energy-saving LED lights
- ✓ Reduced Noise: the low-noise motor makes it possible to listen to your own kitchen story

Features

Technical Data

Typology : Chimney
Approval certificates : CE, VDE
Length of electrical supply cord (cm) : 130
Height of the chimney (mm) : 484-770/554-830
Height of product, without chimney (mm) : 296
Minimum distance above an electric hob : 450
Minimum distance above a gas hob : 600
Net weight (kg) : 15.694
Type of control : Electronic
Maximum output air extraction (m³/h) : 399
Boost position output recirculating (m³/h) : 398.0
Maximum output recirculating air (m³/h) : 320
Boost position air extraction (m³/h) : 669
Number of lights (Stck) : 2
Noise level (dB(A) re 1 pW) : 60
Diameter of air outlet (mm) : 120 / 150
Grease filter material : Washable aluminium
EAN code : 4242004247173
Connection rating (W) : 255
Current (A) : 10
Voltage (V) : 220-240
Frequency (Hz) : 50; 60
Plug type : GB plug
Installation type : Wall-mounted

Optional accessories

Z50XPOX0 : Long Life odor filter (replacement) , Z5138X1 : Standard odor filter (replacement) , Z51DX11X6 : Clean Air Plus recirculation kit , Z51EIU1X1 : Standard recirculation kit , Z51FXC1N6 : Clean Air Plus recirc. kit external , Z51FXD1N1 : Long Life recirculation kit external , Z51FXJ0X0 : Long Life recirculation kit , Z53XXB1X6 : Clean Air Plus odor filter (replacement) , Z5861N0 : Back panel stainless steel , Z5895N0 : Stainless steel back panel 900 mm , Z5905N0 : Chimney extension 1000 mm , Z5915N0 : Chimney extension 1500 mm



4 242004 247173

N 30, Wall-mounted cooker hood, 80 cm, Black
D85IEE1S0B



COOKING PASSION SINCE 1877

Features

Key performance features:

- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
max. Normal use 399 m³/h
Intensive 669 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 60 dB dB*

Features

- Soft touch control
- 3 speeds plus intensive
- 2 x 1.5w LED Light
- Colour Temperature: 3500 K
- Automatic intensive revert (6mins)
- 2 metal grease filter cassettes
- For wall mounted installation
- Rim ventilation

Design

- Chimney hood
- Electronic controls

Performance/technical information

- Suitable for ducted extraction and recirculation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Extraction rate according to EN 61591 max. 399 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 60 dB (A) re 1pW
- Noise level according to EN 60704-3 and EN 60704-2-13 at max. normal use exhaust air: 60 dB(A) re 1 pW
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
Max. normal use: 60 dB(A) re 1 pW
Intensive: 69 dB(A) re 1 pW
- With the Clean Air Plus recirculation kit (available as optional accessory) your appliances reaches:
Extraction rate in recirculation mode:
Max. normal use: 349 m³/h
Intensive: 474 m³/h
Noise level in recirculation mode:
Max. normal use: 69 dB(A) re 1 pW
Intensive: 76 dB(A) re 1 pW
- Power rating: 255 W
- Light Intensity: 114 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 780-1066 x 800 x 434 mm
- Dimensions recirculating (HxWxD): 850-1126 x 800 x 434 mm
- Dimensions recirculating with CleanAir module (HxWxD):
956 x 800 x 434 mm - mounting with outer chimney
1016-1306 x 800 x 434 mm - mounting with telescopic chimney
- Blower Efficiency Class: B*
- Lighting Efficiency Class: A*
- Grease Filtering Efficiency Class: C*
- Average Energy Consumption: 59.4 kWh/year*

* In accordance with the EU-Regulation No 65/2014

N 30, Wall-mounted cooker hood, 80 cm, Black
D85IEE1SOB

Dimensioned drawings

