


N 50, Built-under fridge with freezer section, 82 x 60 cm
K4336XFF0G



COOKING PASSION SINCE 1877



A++



This undercounter refrigerator with ****freezer compartment keeps produce at its freshest, and is also available with stainless steel door.

- ✓ FreshSafe: Stores your fruit and vegetables safely
- ✓ Adjustable Glass Shelves – Height adjustable shelves create the space you need for inspiring dishes in your fridge
- ✓ Our safety glass shelves happily shoulder generous loads of delicacies in your fridge
- ✓ LED Lighting: Bright light in the entire fridge with long-life LEDs.

Features

Technical Data

Construction type : Built-in
 Door panel options : Possible but accessory
 Height (mm) : 820
 Width of the appliance : 598
 Depth of the product : 548
 Required niche size for installation (HxWxD) : 820 x 600 x 550
 Net weight (kg) : 34.832
 Connection rating (W) : 90
 Current (A) : 13
 Door hinge : Right reversible
 Voltage (V) : 220-240
 Frequency (Hz) : 50
 Approval certificates : CE, G-Mark, VDE
 Length of electrical supply cord (cm) : 230
 Storage Period in Event of Power Failure (h) : 10
 Number of compressors : 1
 Number of independent cooling systems : 1
 Interior ventilator : No
 Reversible Door Hinge : Yes
 Number of Adjustable Shelves in fridge compartment (Stck) : 1
 Shelves for Bottles : Yes
 EAN code : 4242004247029
 Brand : Neff
 Product name / Commercial code : K4336XFF0G
 Product category : Refrigerator
 Energy efficiency rating : A++
 Energy consumption annual (kWh/annum) - NEW (2010/30/EC) : 140.00
 Refrigerator Net capacity (l) - NEW (2010/30/EC) : 108
 Freezer Net capacity (l) - NEW (2010/30/EC) : 15
 Frost free system : No
 Temperature rise time (h) : 10
 Freezing capacity (kg/24h) - NEW (2010/30/EC) : 2
 Noise level (dB(A) re 1 pW) : 38
 Climate class : SN-ST
 Installation type : Built-under



4 242004 247029

*N 50, Built-under fridge with freezer section, 82 x
60 cm
K4336XFF0G*



COOKING PASSION SINCE 1877

Features

Performance and Consumption

- Energy Efficiency Class: A++
- Energy consumption: 140 kWh kWh/yr.
- Total net capacity: 123 l litres
- Noise level dB(A) re 1 pW: 38
- Fully integrated

Functions

- Ventilation through plinth
- Easy clean interior
- Interior design with metal applications

Design features

- Electronic control (LED chain)
- Automatic defrost fridge
- Single cooling circuit

Design features

- Net fridge capacity: 108 litres
- 2 safety glass shelves in fridge compartment of which 1 are height adjustable
- Full width pull out drawer
- Door shelves in fridge door: 1 large and 2 small.
- Bottle holder in x-deep door tray
- Bright interior LED fridge light

Freshness System

- 2 vegetable/salad containers

Food freshness system

- Net freezer capacity: 15 litres
- Maximum freezer storage time in power failure: 10 hours
- Freezing capacity in 24 hours: 2 kg
- 1 hinged freezer compartment
- Ice box

Key features - Fridge section

- Height adjustable feet in the front
- Right hinged door, reversible
- Climate class SN-ST (suitable for ambient temperatures between 10 to 38°C)
- Connection value 90 W
- 220 - 240 V

Dimension and installation

- Niche Dimensions: 82 cm H x 60 cm W x 55 cm D
- Dimensions: 82 cm H x 59.8 cm W x 54.8 cm D

Key features - Freezer section

- K4336XFF0G

Included accessories

- KU1213Z0

Country Specific Options

- Gross capacity, total: 131 l
- Gross capacity cooling 116 l
- **** freezer (-18°C and below)
- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.


Design features

Dimension and installation

Additional features

N 50, Built-under fridge with freezer section, 82 x
60 cm
K4336XFF0G

Dimensioned drawings

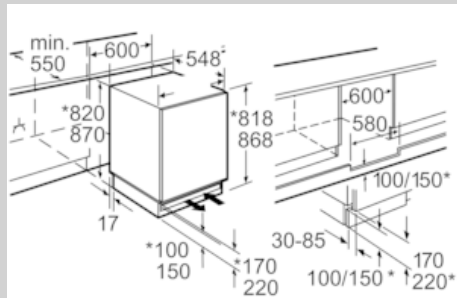


* Variable base/
substructure height

Space for electrical connection next to
the appliance on the left or right-hand side.
Ventilation space in the base.

Measurements in mm

measurements in mm
Recommended gap dimensions for flat hinges



F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

The gap dimensions recommended
in the table must be adhered to in order
to ensure that appliance doors do not
collide with anything when they are opened,
and to avoid causing damage to kitchen units.