

## iQ700, Wall-mounted cooker hood, 90 cm, clear glass black printed LC91KWW60B



A+

Angled extractor hood with outstanding design and high extraction rate for a powerful performance.

- ✓ iQdrive motor - The quiet, high-performance motor ensures efficient removal of odours and steam.
- ✓ cookConnect and climateControl sensor: detects and removes steam and odours automatically
- ✓ emotionLight Pro: Adapt your extractor hood to your style.
- ✓ voiceControl – Control hood functions and lighting using your voice.
- ✓ Home Connect – The app that makes your hood work smarter.

### Features

#### Technical Data

Typology : Wall-mounted  
 Approval certificates : CE, E17D UKCA marking, G-Mark, VDE  
 Length of electrical supply cord : 130 cm  
 Height of product, without chimney : 323 mm  
 Minimum distance above an electric hob : 450 mm  
 Minimum distance above a gas hob : 650 mm  
 Net weight : 24.791 kg  
 Type of control : Electronic  
 Number of speed settings : 3-stage + 2 intensive  
 Maximum output air extraction : 525 m³/h  
 Boost position output recirculating : 512 m³/h  
 Maximum output recirculating air : 402 m³/h  
 Boost position air extraction : 991 m³/h  
 Number of lights (Stck) : 2  
 Noise level : 58 dB(A) re 1 pW  
 Diameter of air outlet : 120 / 150 mm  
 Grease filter material : Washable aluminium  
 EAN code : 4242003761113  
 Connection rating : 270 W  
 Fuse protection : 10 A  
 Voltage : 220-240 V  
 Frequency : 50; 60 Hz  
 Plug type : GB plug  
 Installation type : Wall-mounted



4 242003 761113

### Optional accessories

LZ31XXB16	Clean Air Plus odor filter (replacement)
LZ11AXE61	Chimney standard black
LZ11AXC56	Clean Air Plus recirc. kit external
LZ11AKV16	Clean Air Plus recirc. kit (chimless)
LZ10AXL50	Chimney extension 1500 mm
LZ10AXK50	Chimney extension 1000 mm
LZ10AKS00	Long Life recirculation kit
LZ10AKR00	Long Life recirculation kit (chimless)

## iQ700, Wall-mounted cooker hood, 90 cm, clear glass black printed LC91KWW60B

### Features

#### Key performance features:

- Energy Efficiency Class: A+ (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 525 m³/h
- Intensive 991 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 58 dB dB\*

#### Features

- climateControl sensor
- Additional functions: Ambient light RGB
- Boost function
- cookConnect hob based hood control

#### Home Connect: Remote Monitoring and Control

- 3 power levels and 2 intensive settings
- softLight with dimmer function
- softLight with dimmer function
- 2 x 3w LED Light
- Colour Temperature: 3500 K
- Efficient BLDC motor
- Twin channel high performance fan motor
- Automatic after running (Automatic after running (10 minutes))
- Automatic intensive revert (6mins)
- 2 x metal grease filter cassettes
- Grease and charcoal filter saturation indicators
- easy to clean Inner frame
- Installation: wall
- Rim ventilation

#### Design

- Black glass
- 
- Chimney hood
- Installation system: Wall fixing inclined/flat/cube
- touchControl for extractor speeds and light
- Electronic control

#### Performance/technical information

- Suitable for ducted and re-circulating operation
- In recirculation operation chimless use possible
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Max. extraction rate: 991 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 58 dB(A) re 1 pW
- Intensive: 71 dB(A) re 1 pW
- Power rating: 270 W
- Light Intensity: 519 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 930-1200 x 890 x 499 mm
- Dimensions recirculating, chimney (HxWxD): 990-1260 x 890 x 499 mm
- 
- Dimensions recirculating, chimless (HxWxD): 454 mm x 890 x 499 mm

- Dimensions recirculating with CleanAir module (HxWxD):
- 1120 x 890 x 499 mm - mounting with outer chimney
- 1190-1460 x 890 x 499 mm - mounting with telescopic chimney
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: B\*
- Average Energy Consumption: 38.5 kWh/year\*


#### Optional accessories

- Recirculating kit LZ00XXP00




\* In accordance with the EU-Regulation No 65/2014

iQ700, Wall-mounted cooker hood, 90 cm, clear glass black printed  
LC91KWW60B

Dimensioned drawings


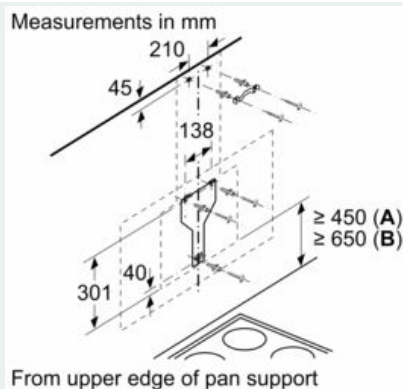


A: Electric  
B: Gas

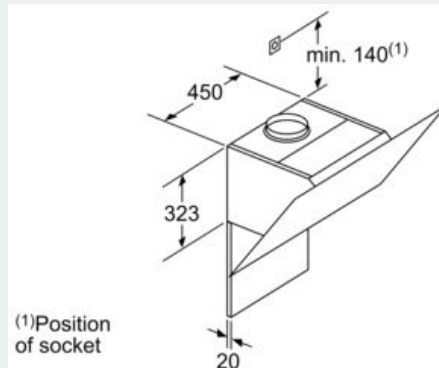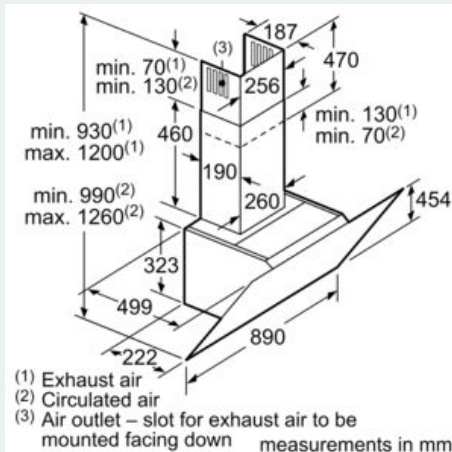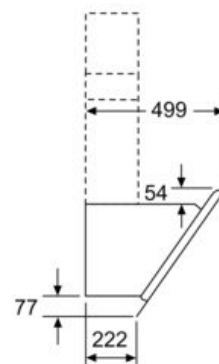

Note the maximum thickness of the back panel.

measurements in mm

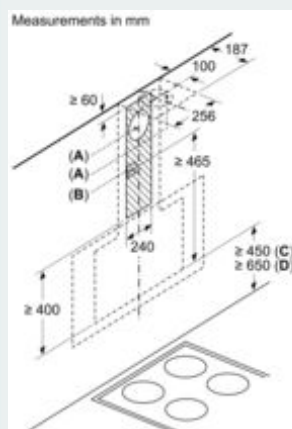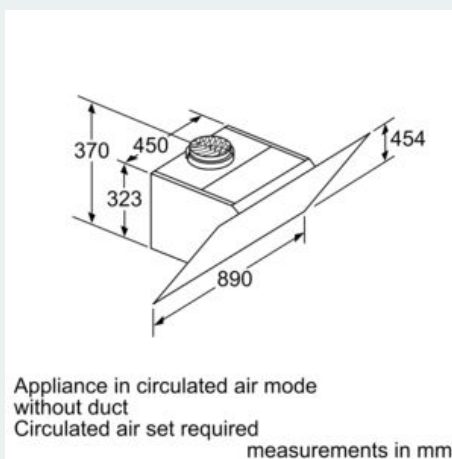

C: Electric  
D: Gas