

## iQ300, Wall-mounted cooker hood, 80 cm, clear glass black printed LC87KHM60B



Angled extractor hood with outstanding design and high extraction rate for a powerful performance.

- ✓ LED lights: for optimal visibility and ambience while cooking.
- ✓ Extremely quiet – The quiet hood that keeps the calm your kitchen.
- ✓ touchControl: quickly and easily manage the power levels and the LED light

### Features

#### Technical Data

Typology : Wall-mounted  
 Approval certificates : CE, E17D UKCA marking, VDE  
 Length of electrical supply cord : 130 cm  
 Height of product, without chimney : 323 mm  
 Minimum distance above an electric hob : 450 mm  
 Minimum distance above a gas hob : 650 mm  
 Net weight : 22.441 kg  
 Type of control : Electronic  
 Maximum output air extraction : 416 m³/h  
 Boost position output recirculating : 469 m³/h  
 Maximum output recirculating air : 367 m³/h  
 Boost position air extraction : 700 m³/h  
 Number of lights (Stck) : 2  
 Noise level : 58 dB(A) re 1 pW  
 Diameter of air outlet : 120 / 150 mm  
 Grease filter material : Washable aluminium  
 EAN code : 4242003761007  
 Connection rating : 263 W  
 Fuse protection : 10 A  
 Voltage : 220-240 V  
 Frequency : 50; 60 Hz  
 Plug type : GB plug  
 Installation type : Wall-mounted



### Optional accessories

|           |  |
|-----------|--|
| LZ31XXB16 | Clean Air Plus odor filter (replacement) |
| LZ11AXE61 | Chimney standard black                   |
| LZ11AXC56 | Clean Air Plus recirc. kit external      |
| LZ11AKV16 | Clean Air Plus recirc. kit (chimless)    |
| LZ10AXL50 | Chimney extension 1500 mm                |
| LZ10AXK50 | Chimney extension 1000 mm                |
| LZ10AKS00 | Long Life recirculation kit              |
| LZ10AKR00 | Long Life recirculation kit (chimless)   |

## iQ300, Wall-mounted cooker hood, 80 cm, clear glass black printed LC87KHM60B

### Features

#### Key performance features:

- Energy Efficiency Class: B (at a range of energy efficiency classes from A+++ to D)
- Extraction rate according to EN 61591 ø 15 cm:
- max. Normal use 416 m³/h
- Intensive 700 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 58 dB dB\*

#### Features

- 3 x power levels plus intensive setting
- 2 x 1.5W LED
- Colour Temperature: 3500 K
- Twin channel high performance fan motor
- Automatic intensive revert (6mins)
- 2 x metal grease filter cassettes
- easy to clean Inner frame
- Installation: wall
- Rim ventilation

#### Design

- Black glass
- 
- Chimney hood
- touchControl for extractor speeds and light
- Electronic control

#### Performance/technical information

- Suitable for ducted and re-circulating operation
- In recirculation operation chimless use possible
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Installation system: Wall fixing inclined/flat/cube
- Max. extraction rate: 700 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:
- Max. normal use: 58 dB(A) re 1 pW
- Intensive: 67 dB(A) re 1 pW
- Power rating: 263 W
- Light Intensity: 90 lux
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 928-1198 x 790 x 499 mm
- Dimensions recirculating, chimney (HxWxD): 988-1258 x 790 x 499 mm
- 
- Dimensions recirculating, chimless (HxWxD): 452 mm x 790 x 499 mm
- Dimensions recirculating with CleanAir module (HxWxD):
- 1118 x 790 x 499 mm - mounting with outer chimney
- 1188-1458 x 790 x 499 mm - mounting with telescopic chimney
- Blower Efficiency Class: B\*
- Lighting Efficiency Class: B\*
- Grease Filtering Efficiency Class: C\*
- Average Energy Consumption: 56.6 kWh/year\*


#### Optional accessories

- Recirculating kit LZ10AXL50


\* In accordance with the EU-Regulation No 65/2014

iQ300, Wall-mounted cooker hood, 80 cm, clear glass black printed LC87KHM60B


Dimensioned drawings

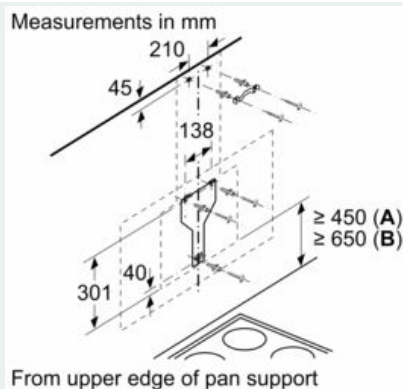


A: Electric  
B: Gas

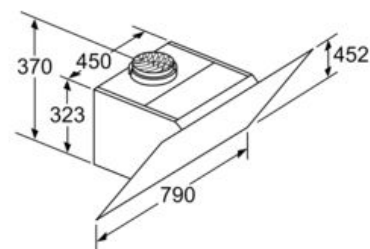

Appliance in circulated air mode  
without duct  
Circulated air set required


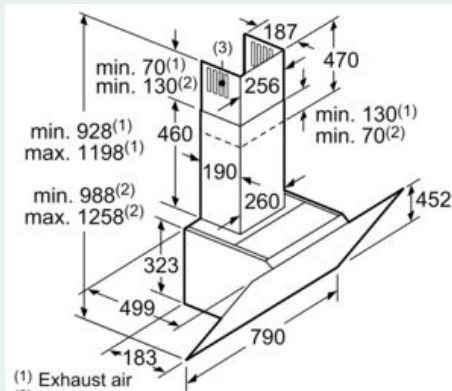


measurements in mm

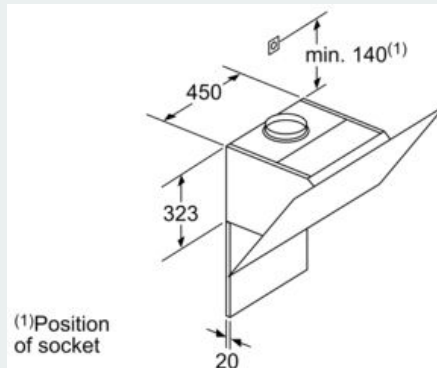

Note the maximum  
thickness of the back panel.

measurements in mm

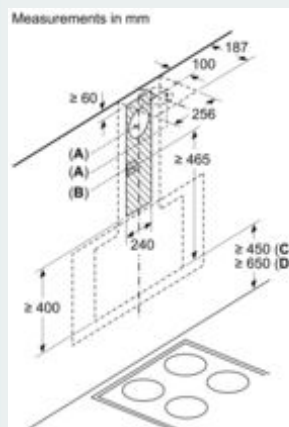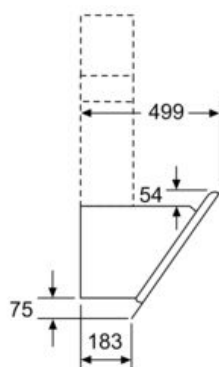

From upper edge of pan support

C: Electric  
D: Gas