

**iQ100, Canopy cooker hood, 53 cm,
anthracite
LB53NAA30B**



Optional accessories

LZ10INT00	Standard recirculation kit
LZ10INA00	Standard odor filter (replacement)

The powerful canopy cooker hood is concealed in a unit above the hob.

✓ LED lights: for optimal visibility and ambience while cooking.

Features

Technical Data

Typology : Built-in/Built-under

Approval certificates : CE

Length of electrical supply cord : 150 cm

Required niche size for installation (HxWxD) : 208mm x 493.0mm x 257mm mm

Minimum distance above an electric hob : 550 mm

Minimum distance above a gas hob : 650 mm

Net weight : 3.770 kg

Type of control : mechanical

Number of speed settings : 3

Maximum output air extraction : 302 m³/h

Maximum output recirculating air : 300 m³/h

Number of lights (Stck) : 2

Noise level : 62 dB(A) re 1 pW

Diameter of air outlet : 120 mm

Grease filter material : Washable aluminium

EAN code : 4242003831717

Connection rating : 121 W

Fuse protection : 5 A

Voltage : 220-240 V

Frequency : 50 Hz

Plug type : GB plug

Installation type : Built-in



4 242003 831717

iQ100, Canopy cooker hood, 53 cm, anthracite LB53NAA30B

Features

Key performance features:

- Energy Efficiency Class: D (at a range of energy efficiency classes from A+++ to D)
- Max. extraction rate: 302 m³/h
- Noise max. Normal Level: Noise, max. speed in normal us: 62 dB dB*

Features

- Push button control for extractor speeds and light
- 3 x power levels
- 2 x 3W LED
- Colour Temperature: 2700 K
- 1 x metal grease filter cassette
- Installation: integrated

Design

- Canopy hood
- Mechanical

Performance/technical information

- Suitable for ducted and re-circulating operation
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Extraction rate according to EN 61591: max. 302 m³/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 62 dB(A) re 1 pW (48 dB(A) re 20 µPa sound pressure)
- Power rating: 121 W
- Light Intensity: 78 lux
- Electrical cable length 1.5 m
- Diameter pipe Ø 120 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 208-208 x 534 x 300 mm
- Dimensions recirculating, chimney (HxWxD): 208-208 x 534 x 300 mm
- Built-in dimensions (HxWxD): 208 x 493 x 257 mm
- Blower Efficiency Class: E*
- Lighting Efficiency Class: D*
- Grease Filtering Efficiency Class: D*
- Average Energy Consumption: 67.7 kWh/year*


Optional accessories

- Recirculating kit LZ10INA00


* In accordance with the EU-Regulation No 65/2014

iQ100, Canopy cooker hood, 53 cm,
anthracite
LB53NAA30B

Dimensioned drawings

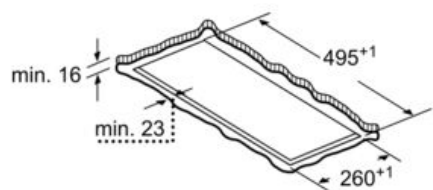


measurements in mm

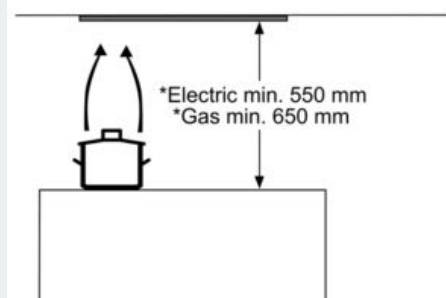


* from upper edge of
pan support

measurements in mm

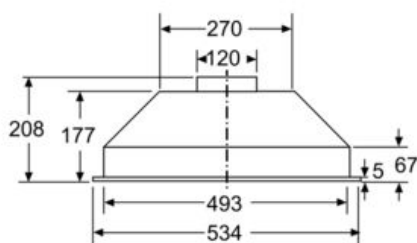

measurements in mm

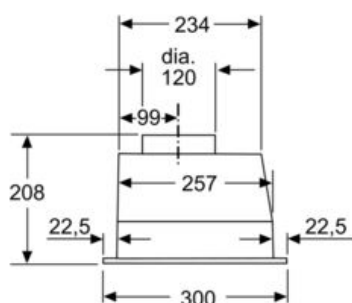

measurements in mm