

DA 1260

Built-under cooker hood
with energy-efficient LED lighting and sliding switch for simple operation.



- Minimalist design - 598mm wide space saving solution
- Powerful - 545m³/h on the booster setting
- Efficient filtration- 10-ply stainless-steel grease filter
- Safe and easy to clean - Miele CleanCover
- Suitable for every home - for extraction or recirculation

EAN: 4002515792186 / material number: 10568360

Construction type	
Built-under hood	•
Design	
Colour	Stainless steel
Operating modes	
Type of air guide	Convertible
User convenience	
Mechanical controls	•
Slide switch	•
Power levels (excluding booster levels)	3
Cleaning convenience	
Easy-to-clean canopy interior – CleanCover	•
Filter system	
Number of dishwasher safe stainless steel grease filters	2
Lighting	
LED	•
Light intensity in Lx	330
Colour temperature in K	3,000
Fan	
Single-action fan	•
AC motor	•
Air throughput with max. duct diameter in extraction mode (not for external version)	
Air throughput in Level 1 (m ³ /h)	275
Air throughput in Level 2 (m ³ /h)	315
Air throughput in Level 3 (m ³ /h)	355
Air throughput in booster level 1 (m ³ /h)	545
Sound power in Level 1 (dB(A) re 1 pW)	57
Sound power in Level 2 (dB(A) re 1 pW)	60
Sound power in Level 3 (dB(A) re 1 pW)	64
Sound power in booster level 1 (dB(A) re 1 pW)	74
Sound pressure in Level 1 (dB(A) re 20 µPa)	43
Sound pressure in Level 2 (dB(A) re 20 µPa)	47
Sound pressure in Level 3 (dB(A) re 20 µPa)	50
Sound pressure in booster level 1 (dB(A) re 20 µPa)	60
Sound pressure in booster level 2 (dB(A) re 20 µPa)	60

DA 1260


Built-under cooker hood
with energy-efficient LED lighting and sliding switch for simple operation.



Air throughput in recirculation mode	
Air throughput in Level 1 (m³/h)	165
Air throughput in Level 2 (m³/h)	180
Air throughput in Level 3 (m³/h)	195
Air throughput in booster level 1 (m³/h)	220
Sound power in Level 1 (dB(A) re 1 pW)	71
Sound power in Level 2 (dB(A) re 1 pW)	72
Sound power in Level 3 (dB(A) re 1 pW)	73
Sound power in booster level 1 (dB(A) re 1 pW)	75
Sound power in booster level 2 (dB(A) re 1 pW)	75
Sound pressure in Level 1 (dB(A) re 20 µPa)	57
Sound pressure in Level 2 (dB(A) re 20 µPa)	58
Sound pressure in Level 3 (dB(A) re 20 µPa)	59
Sound power in booster level 1 (dB(A) re 1 pW)	62
Sound pressure in booster level 2 (dB(A) re 20 µPa)	62
Technical data	
Canopy width in mm	598
Canopy height in mm	125
Canopy depth in mm	500
Minimum height above electric hobs in mm	450
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Net weight in kg	11.2
Length of supply lead in m	1.5
Standard plug fitted	•
Total rated load in kW	0.24
Voltage in V	230
Fuse rating in A	10
Number of phases	1
Installation notes	
Extraction ducting connection at top	•
Diameter of extraction ducting connection in mm	150
Fitting template	•
Standard accessories	
Deflector for recirculation	•

DA 1260

Built-under cooker hood
with energy-efficient LED lighting and sliding switch for simple operation.

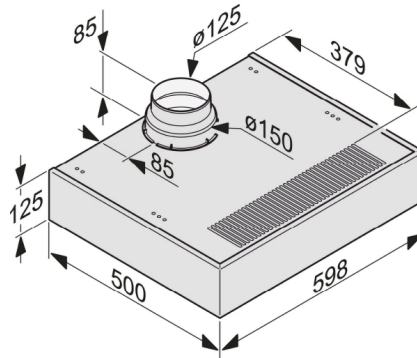

DA 1060, DA 1160, DA 1260 (Installation drawing)