

DA 1867

Slot-in cooker hood

with energy-efficient LED lighting and light-touch switches for easy use.



- Invisible - can be concealed with kitchen décor
- Powerful - 690m³/h on the booster setting
- Energy-efficient and uniform illumination - 2 LED spotlights
- Safe and easy to clean - Miele CleanCover
- For perfect functionality - accessories for proper venting

EAN: 4002516002802 / material number: 10888770

Construction type	
Slot-in cooker hood	•
Design	
Colour	Stainless steel
Operating modes	
Type of air guide	Convertible
User convenience	
Electronic controls	•
Light-touch controls	•
Power levels (excluding booster levels)	3
Programmable Booster level switch-off	•
Filter system	
Number of dishwasher safe metal grease filters	2
Lighting	
LED	•
Light intensity in Lx	210
Fan	
Dual-action fan	•
AC motor	•
Air throughput with max. duct diameter in extraction mode (not for external version)	
Air throughput in Level 1 (m³/h)	320
Air throughput in Level 2 (m³/h)	480
Air throughput in Level 3 (m³/h)	610
Air throughput in booster level 1 (m³/h)	690
Sound power in Level 1 (dB(A) re 1 pW)	52
Sound power in Level 2 (dB(A) re 1 pW)	62
Sound power in Level 3 (dB(A) re 1 pW)	67
Sound power in booster level 1 (dB(A) re 1 pW)	69
Air throughput in recirculation mode	
Air throughput in Level 1 (m³/h)	225
Air throughput in Level 2 (m³/h)	290
Air throughput in Level 3 (m³/h)	315
Air throughput in booster level 1 (m³/h)	330
Sound power in Level 1 (dB(A) re 1 pW)	68
Sound power in Level 2 (dB(A) re 1 pW)	73
Sound power in Level 3 (dB(A) re 1 pW)	75
Sound power in booster level 1 (dB(A) re 1 pW)	76
Sound power in booster level 2 (dB(A) re 1 pW)	76

DA 1867

Slot-in cooker hood

with energy-efficient LED lighting and light-touch switches for easy use.




Technical data	
Canopy width in mm	599
Canopy height in mm	450
Canopy depth in mm	275
Minimum height above electric hobs in mm	650
Minimum height above gas hobs (max. 12.6 kW total power, burner ≤ 4.5 kW) in mm	650
Net weight in kg	11.8
Length of supply lead in m	1.2
Standard plug fitted	•
Total rated load in kW	0.25
Voltage in V	230
Fuse rating in A	5
Number of phases	1
Installation notes	
Extraction ducting connection at top	•
Diameter of extraction ducting connection in mm	150
Fitting template	•
Standard accessories	
Non-return flap	•

DA 1867

Slot-in cooker hood

with energy-efficient LED lighting and light-touch switches for easy use.

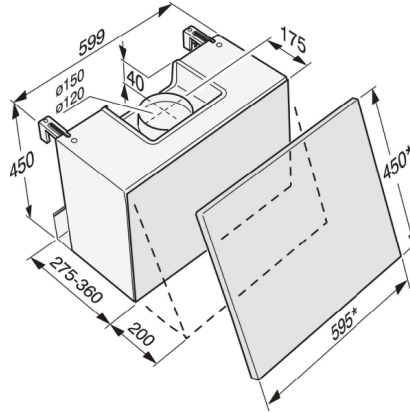

DA 186, DA 1867 (Installation drawing) - US

* Measurements of furniture front