

**Serie | 2, Built-in fridge-freezer with freezer at bottom, 177.2 x 54.1 cm, flat hinge  
KIN86NFF0G**



**Included accessories**

3 x egg tray  
1 x ice cube tray



**The spacious built-in fridge-freezer combination with NoFrost provides optimal food storage and ice formation is no longer an issue.**

- **MultiBox XXL:** extra-large drawer for your fruit and vegetables.
- **EcoAirflow:** optimal air circulation and a constant temperature level in the cooling area.
- LED lights bring a completely new lighting concept to fridges
- **SuperFreezing:** Protects frozen food from defrosting.
- **NoFrost:** never defrost again, thanks to perfect protection from ice formation - that saves time and effort.

**Technical Data**

Energy Efficiency Class: F

Average annual energy consumption in kilowatt hour per year (kWh/a): 293 kWh/annum

Sum of volume of frozen compartments: 76 l

Sum of volume of chill compartments: 184 l

Airborne acoustical noise emissions : 39 dB(A) re 1 pW

Airborne acoustical noise emission class: C

Construction type: Built-in

Door panel options: Possible but accessory

Width of the appliance: 541 mm

Depth of the product: 548 mm

Required niche size for installation (HxWxD): 1775.0 x 560 x 550 mm

Net weight: 53.107 kg

Fuse protection: 10 A

Door hinge: Right reversible

Voltage: 220-240 V

Frequency: 50 Hz

Approval certificates: CE, E17D UKCA marking, VDE

Length of electrical supply cord: 230 cm

Storage Period in Event of Power Failure (h): 10 h

Number of compressors: 1

Number of independent cooling systems: 1

Interior ventilator: No

Reversible Door Hinge: Yes

Number of Adjustable Shelves in fridge compartment (Stck): 3

Shelves for Bottles: No

Frost free system: Freezer

Installation type: Full-integrated

Type of hinge: Flush-folding



4 242005 274888

## **Serie | 2, Built-in fridge-freezer with freezer at bottom, 177.2 x 54.1 cm, flat hinge KIN86NFF0G**

**The spacious built-in fridge-freezer combination with NoFrost provides optimal food storage and ice formation is no longer an issue.**

### **Key features - Fridge section**

- Right hinged door, door reversible
- 220 - 240 V

### **Key features - Freezer section**

- 3 x egg tray, 1 x ice cube tray

### **Country Specific Options**

- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.

- 
- Built-in fridge-freezer combination
  - easy Installation

### **Performance and Consumption**

- EU19\_EEK\_D: F
- Total Volume : 260 l
- Net Fridge Volume : 184 l
- Net Freezer Volume : 76 l
- Freezing capacity 24h : 4 kg
- Annual Energy Consumption: 293 kWh/a
- Climate Class: SN-ST
- Noise Level : 39 dB , EU19\_Noise emission class\_D: C
- Temperature rise time : EU19\_Temperature rise time\_D: 10 H

### **Functions**

- Bright interior LED fridge light

### **Design features**

- LED electronic control
- Super Cooling: No
- optical, acoustic for Fridge and Freeze

### **Design features**

- 4 safety glass shelves in fridge compartment of which 3 are height adjustable
- 3 door trays, including 0x dairy compartment
- 1 removable door storage compartments.

### **Freshness System**

- 1 MultiBox - Transparent drawer with a rippled bottom, ideal for storing fruits and vegetables.

### **Food freshness system**


- SuperFreezing function with automatic deactivation
- NoFrost freezer, never have to defrost ever again
- 3 freezer drawers

### **Dimension and installation**

- Dimensions: 177.2 cm H x 54.1 cm W x 54.8 cm D
- Niche Dimensions: 177.5 cm H x 56 cm W x 55 cm D


## Serie | 2, Built-in fridge-freezer with freezer at bottom, 177.2 x 54.1 cm, flat hinge KIN86NFF0G

measurements in mm

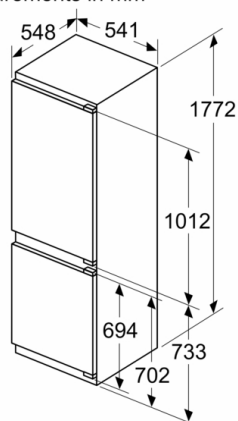


measurements in mm

Recommended gap dimensions for flat hinges




F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.

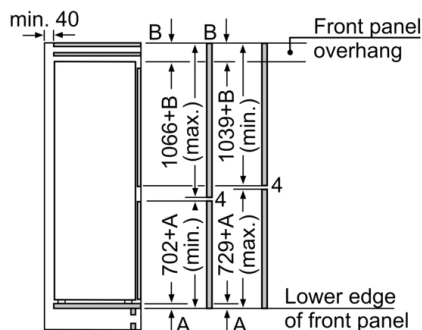


The specified unit door dimensions are valid for a door gap of 4 mm.



measurements in mm

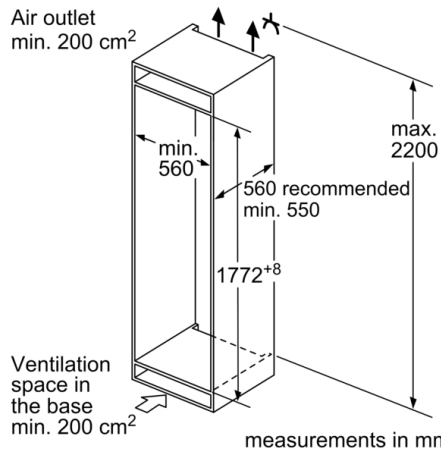

measurements in mm



A: Air inlet  $\geq 200 \text{ cm}^2$ ; Ventilation options  
B: Air outlet  $\geq 200 \text{ cm}^2$ ; Ventilation options



### Maximal permissible weight of the unit fronts

Fitted unit fronts that exceed the permissible weight may cause damage and result in functional impairment of the hinges

Δ Weight  
A: Appliance door height including hinges in mm  
B: Undamped hinge, unit front in kg  
C: Damped hinge, unit front in kg

A	B	C
1500-1750	22	22
720-1400	19	19
A1	15	19
A2	15	19