
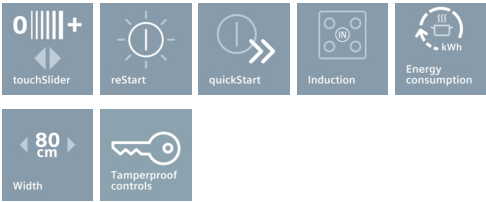


iQ100
EH801FVB1E Induction Hob
Flush fitting design/installation
792 mm

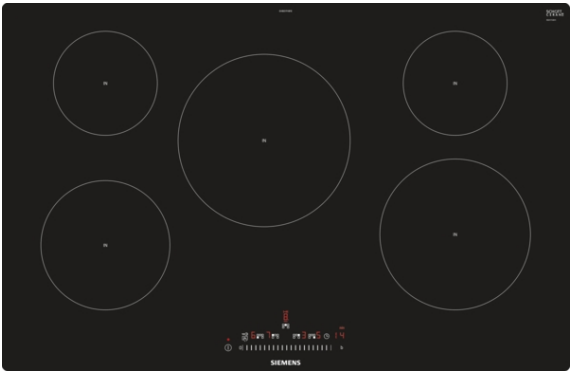

Induction cooktop with innovative features that enable highly flexible cooking in any situation.

- ✓ Innovative induction technology is one of the quickest, safest and most efficient methods of cooking.
- ✓ Shorter heating times with up to 50% more power thanks to the powerBoost function.
- ✓ The touchSlider allows the hob temperature to be controlled by entering it directly or by moving the slider with a single finger.

Features

Technical Data

Product name/family : Cooking zone ceramic
Construction type : Built-in
Source of energy : Electric
Total number of positions that can be used at the same time : 5
Required niche size for installation (HxWxD) : 56 x 780-796 x 500-516
Width (mm) : 792
Dimensions of the product (mm) : 56 x 792 x 512
Net weight (kg) : 15.0
Gross weight (kg) : 17.0
Residual heat indicator : Separate
Control panel : Front
Basic surface material : Ceramic
Color of surface : Black
Approval certificates : AENOR, CE
Length of electrical supply cord (cm) : 110
EAN code : 4242003716335
Electrical connection rating (W) : 7400
Nominal power (kW) : 220-240
Frequency (Hz) : 60; 50



iQ100
EH801FVB1E Induction Hob
Flush fitting design/installation
792 mm

Features

Control:

- touchSlider control

Special features

- Ring zone
- 5 induction cooking zones
- reStart function
- Timer for all zones
Acoustic signal
- 17 power levels
- Power boost setting
- Energy Consumption Display

Safety Features

- Automatic pan recognition
Connection current management (20, 16, 13, 10 Amps options)
Automatic safety switch off
Control panel lock
- 2 stage residual heat indicators
- Main on/off switch

Power and size:

- Cooking zones: 1 x Ø 180 mm, 1.8 KW (max. Power levels 3.1 KW) Induction; 1 x Ø 145 mm, 1.4 KW (max. Power levels 2.2 KW) Induction; 1 x Ø 240 mm, 2.2 KW (max. Powerstufe 3.7 KW) Induktion; 1 x Ø 145 mm, 1.4 KW (max. Power levels 2.2 KW) Induction; 1 x Ø 210 mm, 2.2 KW (max. Power levels 3.7 KW) Induction

Technical information

- Installation measurements: 780 mmx500 mm
- Connection cable (1.1 M)
- Min. worktop thickness: 30 mm
- Connected load: 7.4 kW
- Cable included in packaging

iQ100
EH801FVB1E Induction Hob
Flush fitting design/installation
792 mm

Dimensioned drawings

