

KM 7262 FR

Induction hob with onset controls
with cooking/extended zone at an attractive entry-level price



- Easy operation – EasySelect
- 4 round cooking zones and one cooking/extended zone
- A width of 614mm with stainless steel frame for surface installation
- Shortest heating-up times - TwinBooster

EAN: 4002516149231 / material number: 11144010

Heating type	
Heating type	Induction
Construction type	
Independent of cooker	•
Design	
Elegant glass ceramic surface	•
Ceramic surface colour	Black
Stainless-steel frame	•
Cooking zone details	
Number of cooking zones	4
Maximum number of pans	4
Cooking zone	
Position	front left
Type	Dual-circuit ring
Size in mm	Ø 160-220
Max. rating in W	2300
Max. Booster power rating in W	3000
Max. TwinBooster power rating in W	3650
Position	rear left
Type	Dual-circuit ring
Size in mm	Ø 100-160
Max. rating in W	1400
Max. Booster power rating in W	1700
Max. TwinBooster power rating in W	2200
Position	rear right
Type	Casserole area
Size in mm	190/290
Max. rating in W	2100
Max. Booster power rating in W	3000
Max. TwinBooster power rating in W	3650
Position	front right
Type	Dual-circuit ring
Size in mm	Ø 140-190
Max. rating in W	1850
Max. Booster power rating in W	2500
Max. TwinBooster power rating in W	3000
User convenience	
Display colour	Yellow
Permanent pan recognition	•
Pan and pan size recognition	•
Stop & Go function	•
Recall function	•
Minute minder	•
Safety switch-off	•
Auto heat-up	•
Keeping warm	•
Individual setting options (e.g. buzzers)	•
Cleaning convenience	
Easy to clean ceramic glass	•

more information:
<http://www.miele.co.uk/domestic>

For further information please see next page...

KM 7262 FR


Induction hob with onset controls
with cooking/extended zone at an attractive entry-level price



Safety	
Safety switch-off	•
Lock function	•
System lock	•
Integrated cooling fan	•
Overheating protection	•
Residual heat indicator	•
Technical data	
Dimensions in mm (width)	614
Dimensions in mm (height)	51
Dimensions in mm (depth)	514
Casing height incl. connection box in mm	48
Cutout dimensions in mm (width) with surface-mounted installation	600
Cutout dimensions in mm (depth) with surface-mounted installation	500
Weight in kg	10
Total rated load in kW	7.3
Voltage in V	230
Connection cable length in m	1.4
Standard accessories	
Mains cable	•

KM 7262 FR

Induction hob with onset controls
with cooking/extended zone at an attractive entry-level price

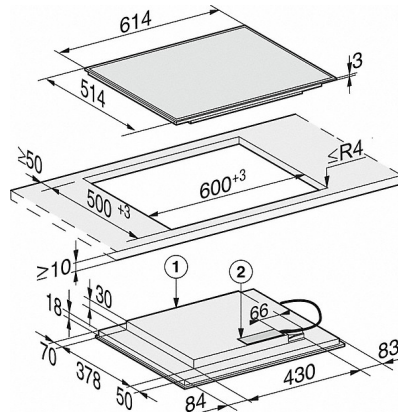

KM 7262 FR (installation drawing)

- 1) Front
- 2) Mains connection box. Mains connection cable L = 1440 mm, supplied loose