

iQ100
LB53NAA30B
Canopy hood
53 cm

D



Optional accessories

LZ10INT00 Recirculating kit

The powerful canopy cooker hood is concealed in a unit above the hob.

- ✓ The 300 m³/h extraction rate supplies clean air when cooking.
- ✓ The energy-saving LED lighting ensures optimal visibility when cooking.

Features

Technical Data

Typology : Traditional
Approval certificates : CE
Length of electrical supply cord (cm) : 150
Required niche size for installation (HxWxD) : 208mm x 493mm x 257mm
Minimum distance above an electric hob : 550
Minimum distance above a gas hob : 650
Net weight (kg) : 4.470
Control panel : mechanical
Number of speed settings : 3
Max. air extraction (m³/h) : 300
Max. recirculation (m³/h) : 300
Number of lights (Stck) : 2
Noise level (dB) : 61
Diameter of air outlet (mm) : 120
Grease filter material : Washable aluminium
EAN code : 4242003831717
Connection rating (W) : 121
Current (A) : 5
Nominal power (kW) : 220-240
Frequency (Hz) : 50
Plug type : GB plug
Installation type : Half-integrated



iQ100
LB53NAA30B
Canopy hood
53 cm

Features

Key performance features:

- Energy Efficiency Class: D (at a range of energy efficiency classes from A++ to E)*
- Max. extraction rate: 300 m³/h
- Noise max. Normal Level: 61 dB*

Features

- Push button control for extractor speeds and light
- 3 x power levels
- 2 x 3W LED
- Colour Temperature: 2700 K
- 1 x metal grease filter cassette
- For installation in a kitchen cabinet

Design

- Canopy hood
- Mechanical

Performance/technical information

- Suitable for ducted and re-circulating operation
- For recirculated extraction a recirculating kit or a CleanAir recirculation kit (accessory) is needed
- Extraction rate according to EN 61591: max. 300 m³/h
- Noise max. Normal Level: 61 dB*
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 61 dB(A) re 1 pW (47 dB(A) re 20 µPa sound pressure)
- Power rating: 121 W
- Light Intensity: 78 lux
- Colour Temperature: 2700 K
- Electrical cable length 1.5 m
- Diameter pipe Ø 120 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 208-208 x 534 x 300 mm
- Dimensions recirculating, chimney (HxWxD): 208-208 x 534 x 300 mm
- built-in dimensions (HxWxD): 208 x 493 x 257 mm
- Energy Efficiency Class: D (at a range of energy efficiency classes from A++ to E)*
- Blower Efficiency Class: E*
- Lighting Efficiency Class: D*
- Grease Filtering Efficiency Class: D*
- Average Energy Consumption: 66.7 kWh/year*


Optional accessories

- Recirculating kit


* In accordance with the EU-Regulation No 65/2014

iQ100
LB53NAA30B
Canopy hood
53 cm

Dimensioned drawings

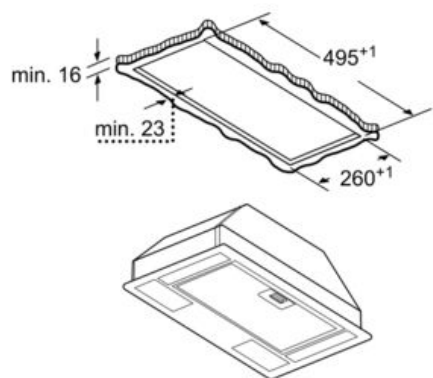


measurements in mm

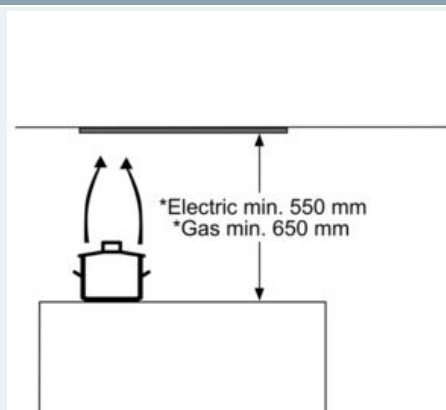


* from upper edge of
pan support

measurements in mm

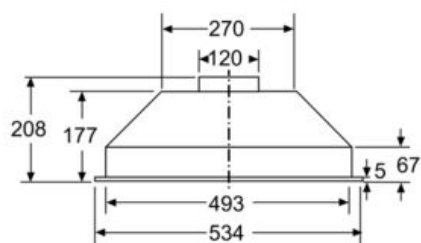

measurements in mm

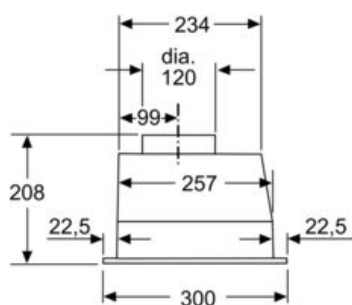

measurements in mm