
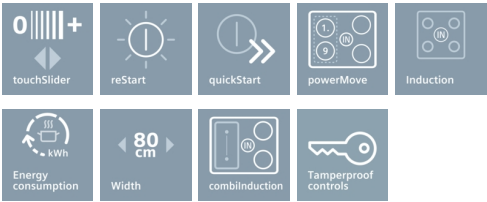


iQ500  
ED851FWB1E Induction Hob  
3 sided bevelled frameless finish  
802 mm

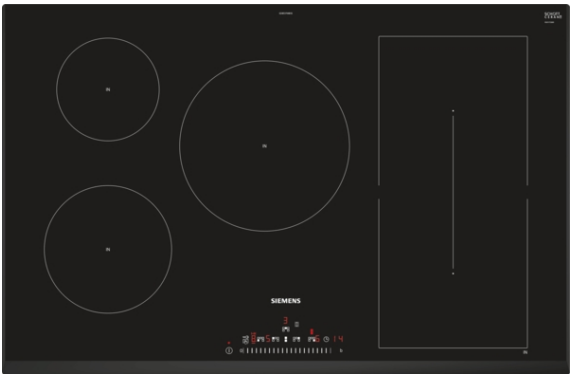

Induction cooktop with innovative features that enable highly flexible cooking in any situation.

- ✓ Shorter heating times with up to 50% more power thanks to the powerBoost function.
- ✓ Automatic simmer function for convenient cooking thanks to preset power levels.
- ✓ CombiInduction enables you to cook with large pots and roasting pans.

Features

Technical Data

Product name/family : Cooking zone ceramic  
Construction type : Built-in  
Source of energy : Electric  
Total number of positions that can be used at the same time : 5  
Required niche size for installation (HxWxD) : 51 x 750-750 x 490-500  
Width (mm) : 802  
Dimensions of the product (mm) : 51 x 802 x 522  
Net weight (kg) : 16.0  
Gross weight (kg) : 18.0  
Residual heat indicator : Separate  
Control panel : Front  
Basic surface material : Ceramic  
Color of surface : Black  
Approval certificates : AENOR, CE  
Length of electrical supply cord (cm) : 110  
EAN code : 4242003715970  
Electrical connection rating (W) : 7400  
Current (A) : 20  
Nominal power (kW) : 220-240  
Frequency (Hz) : 50; 60



**iQ500****ED851FWB1E Induction Hob****3 sided bevelled frameless finish****802 mm****Features****Control:**

- touchSlider control

**Special features**

- combiZone
- 5 induction cooking zones
- 
- reStart function
- Timer for all zones  
Acoustic signal
- 17 power levels
- Power boost setting
- Energy Consumption Display

**Safety Features**

- Automatic pan recognition  
Connection current management (20, 16, 13, 10 Amps options)  
Automatic safety switch off  
Control panel lock
- 2 stage residual heat indicators
- Main on/off switch

**Power and size:**

- Cooking zones: 1 x Ø 180 mm, 1.8 KW (max. Power levels 3.1 KW) Induction; 1 x Ø 145 mm, 1.4 KW (max. Power levels 3.1 KW) Induction; 1 x Ø 240 mm, 2.2 KW (max. Powerstufe 3.7 KW) Induktion; 1 x Ø 210 mm, 2.2 KW (max. Power levels 3.7 KW) Induction; 1 x Ø 210 mm, 2.2 KW (max. Power levels 3.7 KW) Induction

**Technical information**

- Installation measurements: 750 mmx490 mm
- Connection cable (1.1 M )
- Min. worktop thickness: 30 mm
- Connected load: 7.4 kW
- Cable included in packaging

**3 sided bevelled frameless finish**  
**802 mm**

min. 65

min. 45

Drawer

20

①

① Ventilation gap must be present.

Measurements in mm

