


**iQ700**  
**EX651FEC1E Induction Hob**  
**3 sided bevelled frameless finish**  
**592 mm**

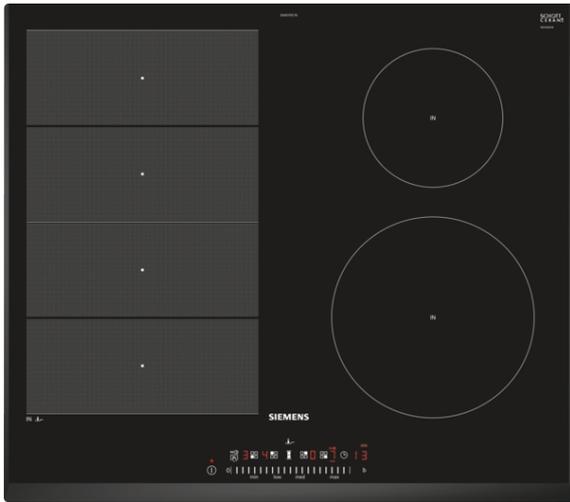

Induction cooktop with innovative features that enable highly flexible cooking in any situation.

- ✓ fryingSensor: maintains the desired pan temperature automatically after heating up to avoid scorching.
- ✓ Flexible cooking thanks to the innovative flexInduction cooking zone and 2 traditional cooking zones.
- ✓ The touchSlider allows the hob temperature to be controlled by entering it directly or by moving the slider with a single finger.

**Features**

**Technical Data**

Product name/family : Cooking zone ceramic  
 Construction type : Built-in  
 Source of energy : Electric  
 Total number of positions that can be used at the same time : 4  
 Required niche size for installation (HxWxD) : 51 x 560-560 x 490-500  
 Width (mm) : 592  
 Dimensions of the product (mm) : 51 x 592 x 522  
 Net weight (kg) : 13.0  
 Gross weight (kg) : 15.0  
 Residual heat indicator : Separate  
 Control panel : Front  
 Basic surface material : Ceramic  
 Color of surface : Black  
 Approval certificates : AENOR, CE  
 Length of electrical supply cord (cm) : 110  
 EAN code : 4242003716786  
 Electrical connection rating (W) : 7400  
 Nominal power (kW) : 220-240  
 Frequency (Hz) : 50; 60



**Optional accessories**

HZ390011 Stainless Steel roaster with glas lid

**iQ700**  
**EX651FEC1E Induction Hob**  
**3 sided bevelled frameless finish**  
**592 mm**

#### Features

##### Control:

- touchSlider control
- fryingSensor with 4 temperature settings

##### Special features

- 1 flexInduction zone. Can be used as 2 single induction zones of 380cm<sup>2</sup> or 1 flexible induction zone of 760cm<sup>2</sup>
- flexInduction zone
- 4 induction cooking zones
- reStart function
- Timer for all zones  
Acoustic signal
- 17 power levels
- Power boost setting
- Energy Consumption Display

##### Safety Features

- Automatic pan recognition  
Connection current management (20, 16, 13, 10 Amps options)  
Automatic safety switch off  
Control panel lock
- 2 stage residual heat indicators
- Main on/off switch

##### Power and size:

##### Technical information

- Cooking zones: 1 x Ø 400 mmx240 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Powerlevels 3.7 KW) Induction; 1 x Ø 145 mm, 1.4 KW (max. Power levels 2.2 KW) Induction; 1 x Ø 210 mm, 2.2 KW (max. Power levels 3.7 KW) Induction
- Installation measurements: 560 mmx490 mm
- Connection cable (1.1 M )
- Min. worktop thickness: 30 mm
- Connected load: 7.4 kW
- Cable included in packaging

**iQ700**  
**EX651FEC1E Induction Hob**  
**3 sided bevelled frameless finish**  
**592 mm**

Dimensioned drawings

