
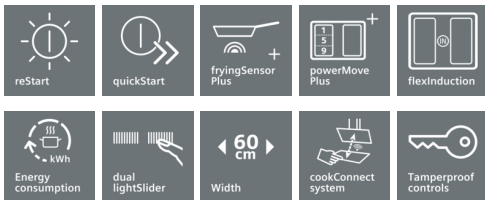


iQ700
EX675LXV1E Induction Hob
Stainless Steel side trim with bevelled front edge
602 mm

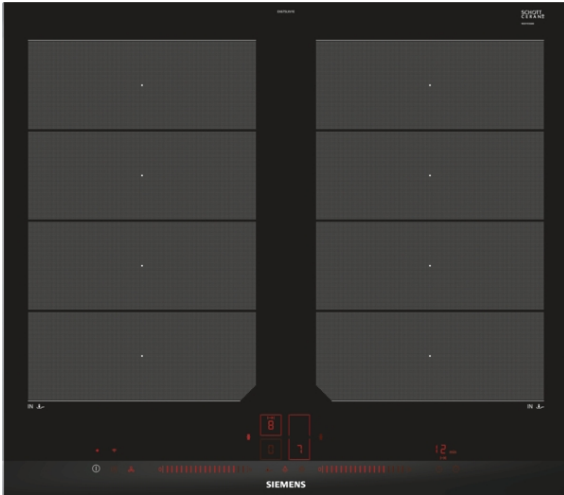

The modern induction cooktop – no more burning, thanks to fryingSensor Plus.

- ✓ powerMove Plus enables intuitive control thanks to three heating zones with different temperatures, just by moving the pan
- ✓ dual lightSlider lets you easily and intuitively operate the hob.
- ✓ Home Connect: Information about your hob, no matter where you are - with the easy-to-use Home Connect App.
- ✓ The convenient cookConnect system allows you to control different functions of the extractor hood directly from your cooktop. (with matching hood)
- ✓ The fryingSensor plus controls the temperature in the pan

Features

Technical Data

Product name/family : Cooking zone ceramic
 Construction type : Built-in
 Source of energy : Electric
 Total number of positions that can be used at the same time : 4
 Required niche size for installation (HxWxD) : 51 x 560-560 x 490-500
 Dimensions : 602
 Dimensions of the product (mm) : 51 x 602 x 520
 Dimensions of the packed product (HxWxD) (mm) : 126 x 753 x 603
 Net weight (kg) : 15.728
 Gross weight (kg) : 17.0
 Residual heat indicator : Separate
 Control panel : Front
 Basic surface material : Ceramic
 Color of surface : Alu, brushed, Black
 Color of frame : Alu, brushed
 Approval certificates : AENOR, CE
 Length of electrical supply cord (cm) : 110
 EAN code : 4242003759011
 Electrical connection rating (W) : 7400
 Nominal power (kW) : 220-240
 Frequency (Hz) : 60; 50



Optional accessories

- | | |
|----------|--|
| HZ399092 | Cookbook frying sensor(5 levels)HC-Dummy |
| HZ390522 | Griddle Plate |
| HZ390512 | Teppan Yaki (large) |
| HZ390230 | System pan diameter 21cm |
| HZ390012 | Steaming Rack for Stainless Steel roaste |
| HZ390011 | Stainless Steel roaster with glas lid |

iQ700
EX675LXV1E Induction Hob
Stainless Steel side trim with bevelled
front edge
602 mm

Features

Control:

- Dual lightSlider
- fryingSensor plus with 5 temperature settings

Special features

- 2 flexInduction zones
- 4 induction cooking zones
- HomeConnect - enables Remote Monitoring and Control through mobile application
- cookConnect - hood control (with Wi-Fi enabled hood)
- powerMove plus
- reStart function
- Timer for all zones
- Acoustic signal
- Count up timer
- Keep warm function
- 17 power levels
- Power boost setting
- panBoost
- Energy Consumption Display

Safety Features

- Automatic pan recognition
- Connection current management (20, 16, 13, 10 Amps options)
- Automatic safety switch off
- Control panel lock
- Control panel pause
- 2 stage residual heat indicators
- Main on/off switch

Power and size:

- Cooking zones: 1 x Ø 380 mmx240 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power levels 3.7 KW) Induction; 1 x Ø 380 mmx240 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power levels 3.7 KW) Induction

Technical information

- Installation measurements: 560 mmx490 mm
- Connection cable (1.1 M)
- Min. worktop thickness: 30 mm
- Connected load: 7.4 kW
- Cable included in packaging

iQ700
 EX675LXV1E Induction Hob
 Stainless Steel side trim with bevelled
 front edge
 602 mm

Dimensioned drawings

