
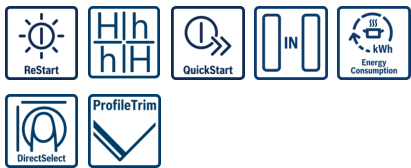


Serie | 6 Hobs

PXX275FC1E
Profile trim (front facette with
side trim)
916 mm

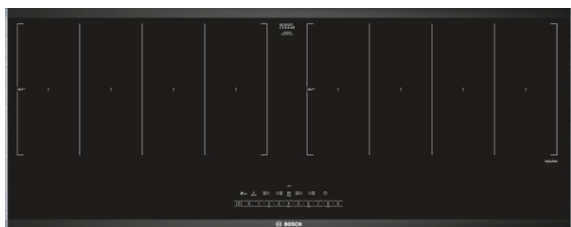

The panorama FlexInduction hob allows you to conveniently place your pots and pans next to each other.

- **DirectSelect:** Direct, simple selection of the desired cooking zone, power and additional functions.
- **PerfectFry:** For perfect browning of roasted foods thanks to sensor control with 4 power levels.
- **FlexInduction Zone:** Get more flexibility by combining the cooking zones into one big zone for placing small pots and large cookware.
- **Induction:** Fast, precise cooking, easy cleaning and low energy consumption.
- **PowerBoost:** Up to 50% more power for faster heating.

Technical Data

Product name/family :	Cooking zone ceramic
Installation type :	Built-in
Heating type :	Electric hob
Total number of positions that can be used at the same time :	4
Required niche size for installation (HxWxD) :	51 x 880-880 x 330-330
Width (mm) :	916
Dimensions of the product (mm) :	51 x 916 x 353
Net weight (kg) :	14.0
Gross weight (kg) :	16.0
Residual heat indicator :	Separate
Location of control panel :	Hob front
Basic surface material :	Glass ceramic
Color of surface :	Alu, Black
Color of frame :	Alu
Approval certificates :	AENOR, CE
Length of electrical supply cord (cm) :	110
EAN code :	4242002854458
Electrical connection rating (W) :	7400
Voltage (V) :	220-240
Frequency (Hz) :	60; 50



Serie | 6 Hobs

PXX275FC1E

Profile trim (front facette with side trim) 916 mm

The panorama FlexInduction hob allows you to conveniently place your pots and pans next to each other.

Design

- Profile trim (front facette with side trim)

Special features

- 2 x flex induction zone zones with different usage possibilities: each has 2 single induction zones of 480 cm² or 1 flexible induction zone of 840 cm²
- 4 induction cooking zones
- DirectSelect
- Digital display
- Variable 17-stage power settings for each zone
- Timer for all zones
Timer - shows how long the cooktop is in use
- Automatic pan recognition sensor
Power management options for 16A, 13A or 10A connection
Automatic safety shut off
Control panel lock
- QuickStart function
- ReStart function
- Energy consumption display
- Cable included
- Connection cable (1.1 M)
- Connected load: 7.4 kW

Power and size:

- Cooking zones: 1 x Ø 210 mmx400 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power levels 3.7 KW) Induction; 1 x Ø 210 mmx400 mm, 3.3 KW (max. Power levels 3.7 KW) Induction or 2 x Ø 200 mm, 2.2 KW (max. Power levels 3.7 KW) Induction
- Min. worktop thickness: 30 mm
- Installation dimensions: (ID/W/D) 51 mm x 880 mm x 330 mm
- Appliance dimensions: (W/D) 916 mm x 353 mm

Safety Features

- 2 stage residual heat indicator for each zone
- Main on/off switch

Control:

- PerfectFry sensor with 5 temperature settings

Quickness:

- PowerBoost function for all zones

Serie | 6 Hobs

PXX275FC1E

Profile trim (front facette with side trim)
916 mm

